

Q-BIC™ RSQB/ RSQBD/ RSQB2 Series

Surface Mount,
Remote Fixture




FEATURES

- Cubic, vandal-resistant surface-mounted fixture
- Single, twin or double cube with center body
- Frosted polycarbonate cube
- CSA certified to C22.2 No. 141-15

See warranty details at: www.tnb.ca/en/brands/lumacell

DIMENSIONS

Dimensions are approximate and subject to change.

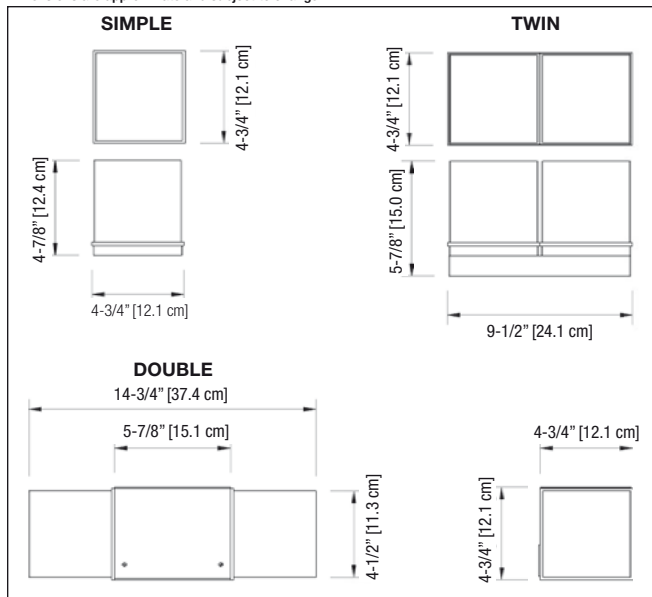

TYPICAL SPECIFICATIONS

Remote heads Series **Q-BIC™** shall be comprised of one (single) or two (double or twin) adjustable heads with LED lamps. Each lamp shall be housed in an impact-resistant polycarbonate cube. The cube lens shall be frosted to diffuse the light. Heads shall provide mounting holes for installation to a standard octagonal box.

The remote fixtures shall be certified to CSA 22.2 No. 141-15.

The remote unit shall be the **Lumacell®** model: RSQ _____ X

WIRE GUARDS

460.0035-L	Wall Mount (RSQB)
460.0031-L	Wall Mount (RSQBD)
460.0080-L	Wall Mount (RSQB2)

REPLACEMENT LAMPS

MODEL	LAMP TYPE	VOLTAGE/WATTAGE
580.0097-L	MR16 LED	6V-4W
580.0122-L	MR16 LED	6V-5W
580.0093-L	MR16 LED	12V-4W
580.0104-L	MR16 LED	12V-5W
580.0106-L	MR16 LED	12V-6W
580.0098-L	MR16 LED	24V-4W
580.0100-L	MR16 LED	24V-6W
580.0113-L	MR16 LED	120V-4W
580.0125-L	MR16 LED	120V-7W

IN THE SAME FAMILY:



- Q-BIC™ Series Battery Unit

ORDERING INFORMATION

SERIES	NUMBER OF HEADS	COLOUR	OPTIONS
RSQB= single cube RSQBD= double cube RSQB2= twin cube	LD1= MR16 LED, 6V-4W LD2= MR16 LED, 6V-5W LD7= MR16 LED, 12V-4W LD9= MR16 LED, 12V-5W LD10= MR16 LED, 12V-6W LD13= MR16 LED, 24V-4W LD14= MR16 LED, 24V-6W LD26= MR16 LED, 120V-4W LD27= MR16 LED, 120V-7W	BK= black Blank= factory white	Blank= no options TP= tamper proof screws ¹ ¹ 690.0454-L= tamper-proof bit (sold separately)

EXAMPLE: RSQBOLD10