
# Accessories

## Stainless steel sealing ring



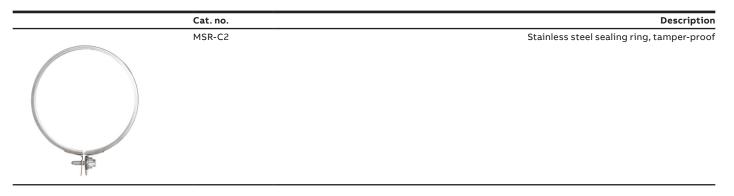

# Meter protectors Product specifications

- Meter protector for use in problem areas (trailer parks, playgrounds, conservation areas)
- Steel construction (16 ga. galv. steel)
- Clear, unbreakable polycarbonate front cover, which allows full view of meter revenue reading and serial number
- Sealing and padlocking provision
- Grey painted

Description	Cat. no.
7% in. dia. x 4% in. deep for use with single-phase residential meters	MP01
7% in. dia. x 8% in. deep for use with all meters, other than single-phase residential meters	MP02

## Blank meter cover plates



Not recommended as a permanent cover for energized meter sockets.

### Jumper bar



Cat. no.

CM-BS100

200 A max.

## Mast coupler



Cat. no. Description

MH200

Fits all sockets with regular 2½ in. hub opening

## Hubs for rigid conduit



	Cat. no.	PVC cat. no.	A hub size (in.)	В
	MH10X	<u> </u>	1	For 2½ in. regular hub opening (add hub adapter plate
	MH12X	E991G	11/4	BS052 if used with units having 4 in. hub openings)
	MH15	E991H	11/2	
	MH20	E991J	2	
	MH25	E991K	21/2	
04	MH30	E991L	3	For 4 in. hub opening
	MH35	<del>_</del>	31/2	
	MH40	<del>-</del>	4	<b>Diagram</b> ← B →



## Accessories

## Hub adapter plate



Cat. no.	Description
B\$052	Permits use of regular size hubs on larger hub openings

Hub opening closure plates



W 10 10 10 10 10 10 10 10 10 10 10 10 10			
	7		,
		1	
		9 8 11	55114c

Cat. no.	Description
BS051	Inside attachment for regular hub opening (i.e. 1 in. to 2½ in.)
BS054	Inside attachment for larger hub opening (i.e. 3 in. to 4 in.)

Single-gang meter sockets insulated neutral kits



Cat. no.	Description
IN1000-M, IN1000-S	100 A series BA/BE, 100 A series PL17
IN2000-M, IN2000-S	200 A series BQ/BS, 200 A series PL27

-M means installs in middle -S means installs on side Specify socket when ordering.

## Single-gang meter sockets ground lug on neutral kit



	Cat. no.	Description
	GN1000	100A Max, for BA, BE series
OIL	GN2000	200 A Max. for BQ2, BS2 series

Click on the button to get to the meter socket conversion kits cross-reference chart.

Click here

## Multi-gang meter sockets insulated neutral kit



BDAX, BDCX, BEX, BECX, BSC4X, CO1X series

Cat. no. Description

IN4000-2, IN4000-3, IN4000-4, IN4000-5, IN4000-6



Click on the button to get to the meter socket conversion kits cross-reference chart.

Click here

## Multi-gang tunnel lugs kit



Description

Cat. no.	Description	Qty.
LA300ZFAB-FG	BECX-V, BECX-VA, BDCX-V, BDCX-VA series	3 lugs (kit)



### Identification marker kits

	Cat. no.	Description	Markers Kit Includes	Qty.
Will second section with the second s	MINI-ID-KIT	Plastic case	Stainless steel markers of each numbers 0 through 9 (dash + service)	10
90. 6 90.7 90.0 90.0 90.0 90.0 90.0 90.0 90.0	MICRO-ID-KIT	Blue metal	Stainless steel markers of each letters A through D	10
carrying case Stainless steel ma	carrying case	carrying case	Stainless steel markers of each numbers 0 through 9	10
		Word "SERVICE"	10	
		_	CM-BS100 Jumper bar 200 A max.	4
- Comments	_	BS2027-FG Meter jaw safety shroud	10	

### Identification markers

	Cat. r
	No. 0
	No. A
3 0 1	No. S
Consist of thermoplastic insulators	


Consist of thermoplastic insulators with jaws and connectors assembled for replacement of one meter socket


No. 0 through No. 9
No. A through No. Z
No. SERVICE

Clipped to the upper lip of the enclosure; provides permanent customer identification; packed and sold in polyethylene bags of 10 identical markers except "SERVICE" which has 7 individual letters


## **Accessories**


# Ready-to-install replacement block assemblies

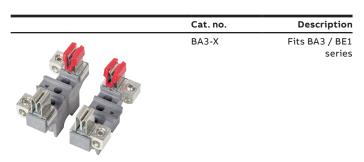

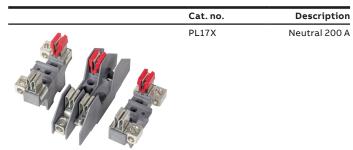



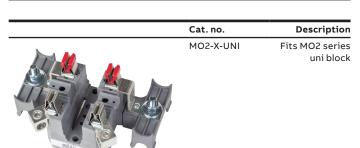

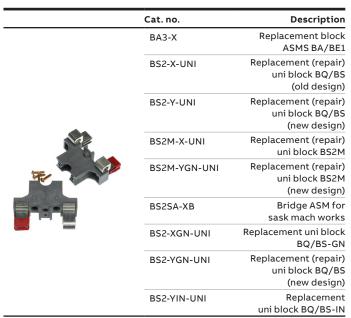

# Repair kits

Available replacement block accesories. Simply add suffix -FG to the components listed in the kit.

## **Bond lug**

Cat. no.	Description
BONDLUG2-FG	Bond lug to be used in BE1, BQ2, BS2, MO2–
NA75Z-3-FG	Bond lug to be used in BS2-TCVBC

## Neutral lug

	Cat. no.	Description
	BS8608-FG	Neutral for MO2 200 A
0.0	CDA110-FG	Neutral for BE1 100 A

## Shroud

Cat. no.	Description
BS2027-FG	Red meter jaw safety shroud

### Set screw

	Cat. no.	Description
	SCREW-BS1002-FG 100A	Set screw only for 100 A lugs
	SCREW-BS2402-FG 200A	Set screw only for 200 A lugs

## Neutral

	Cat. no.	Description
010 5	BS2811L-FG	Neutral 200 A
	BS2811GN-FG	Neutral 200 A, comes with ground lug on neutral

## Accessories

## Fifth jaw assemblies



		Standard capacity 9 o'clock position
	Meter socket series	C205
	ваз	•
	BDC	•
N A	BE1	•
9	BE2	•
	BEC	•
	BD2	•
	BQ2	•
	BS2 / BS2L	•
	BS4 / BSC4	•
	CO1	•
	CO2	•
	CO1 Multigang	
	MO2	•
	JS4B	

\_

## Pole mount bracket kit

	Cat. no.	Description	Conductor range (AWG)	Use with series	Option 1	Option 2
***	РМВ200	Secures Microlectric meter socket to a wooden pole via option 1 or 2	14–2	BA3, BE1, BP320 BQ2, BS, CL, CO1, CO2, CT, MO2, PL17, PL27, VT	Use a lag bolt through ⁵⁄⁄6 in. center keyhole	Use the two side bracket mounting holes (0.320 in. dia.) to wrap around the pole

Suitable for any Microlectric meter socket with mounting holes 5 in. apart. Attach meter socket using one or two bracket(s). PMB200 kit comes complete with 2 brackets, 1 ground connector. Includes assembly hardware.


## Pole mounting kit

				Weight	
	Cat. no.	Kit includes	lb	kg	Qty.
	PMBJS4	Support hangers	9.03	4.09	2
2/10	_	⅓ in. x 4 in. lag bolt	_	_	1
Mes		¾ in. x 3 in. lag bolt	-	_	4
300 P		5/16 in. x 1 in. carriage bolts, nuts and lock washers	-	_	_
C 60	PMB6X12	6 in. offset from pole c/w 12 in. strut	7.7	3.5	1
	PMB6X24	6 in. offset from pole, comes with 24 in. strut	9.2	4.2	1
	PMB9X12	9 in. offset from pole, comes with 12 in. strut	9.2	4.2	1
	PMB9X24	9 in. offset from pole, comes with 24 in. strut	11.0	5.0	1

## Pole line hardware

		· · · · · · · · · · · · · · · · · · ·			Weight (100 pcs)			
Cat. no.	Description	F dia. (in.)	G dia. (in.)	H dia. (in.)	T thick (in.)	lb	kg	Std. pkg.
RC729	Square washer	5/8	2	-	3/16	22	10.0	400
BC301L	Carriage bolt	3/8	1½	11/2	_	11	5.0	50
BO506	Oval eye bolt	5/8	6	3	-	122	55.4	50
BO508	Oval eye bolt	5/8	8	4	-	136	61.8	50
BO510	Oval eye bolt	5/8	10	4	_	150	68.1	50
BO512	Oval eye bolt	5/8	12	4	-	168	76.3	50

## Diagrams

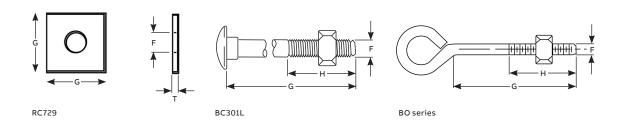

# Accessories

## Breaker mounting bracket

	Cat. no.	Description
11/2	CO3517M-FG	Adjustable mounting bracket for CO2, CO22 and CO42 series to adapt to Siemens, Square D and Eaton breakers
Flexible braid and co	onductor kits	

	Cat. no.	Description
	CO2FB-KIT	Connection wire adaptor kit for CO2 series meter sockets for field installation; to be used with Cutler Hammer breakers
	CO3009-KIT	Siemens type "QR" breaker conductor kit (breakers not included)
e e	CO3009SD-KIT	Square D breaker conductor kit (breakers not included)

1	CO3409FB-KIT	Eaton breaker flexible braid kit (breakers not included)

CO3009A2-KIT	ABB breaker conductor kit (breakers not included)

CO1009A1-KIT	ABB Breaker conductor kit
	for 100 A type A1A

### — Breakers

	Cat. no.	Description
	A1A100TL2TNB-FG	ABB 100 A 10 kA breaker
0,0	A1N100TL2TNB-FG	ABB 100 A 22 kA breaker
	A2A125TL2TNB-FG	ABB 125 A 10 kA breaker
	A2A150TL2TNB-FG	ABB 150 A 10 kA breaker
	A2A200TL2TNB-FG	ABB 200 A 10 kA breaker
	A2N125TL2TNB-FG	ABB 125 A 22 kA breaker
	A2N150TL2TNB-FG	ABB 150 A 22 kA breaker
	A2N200TL2TNB-FG	ABB 200 A 22 kA breaker

## Connector kit

	Cat. no.	Description
50,00	BP250	Connector kit 2 x 250 kcmil
	BP500	Connector kit single lug