

Service entrance cable fittings

Connectors and entrance heads



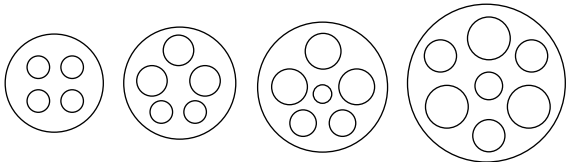
			Clamping range (in.)		Throat (in.)
			Min.	Max.	
Two-screw fittings (zinc alloy)					
 CI808 / CI816 Zinc die cast locknut	CI804	3/8	0.18	0.64	0.64
	CI806	3/4	0.41	0.82	0.83
	CI808	1	0.50	1.04	1.05
	CI810	1 1/4	0.56	1.06	1.37
	CI812	1 1/2	0.63	1.60	1.81
	CI816	2	0.86	2.06	2.05
 CI806 Zinc die cast locknut					
 CI804 Zinc die cast locknut					

NOTE : 3/8 in. trade size connectors require a 1/2 in. knockout.



	Cat. no.	Trade size (in.)
Service entrance heads (cast aluminum) rigid conduit		
 CIEFA-1/2 / CIEFA-4	CIEFA-1/2	1/2
	CIEFA-3/4	3/4
	CIEFA-1	1
	CIEFA-1-1/4	1 1/4
	CIEFA-1-1/2	1 1/2
	CIEFA-2	2
	CIEFA-2-1/2	2 1/2
	CIEFA-3	3
	CIEFA-3-1/2	3 1/2
	CIEFA-4	4
Service entrance heads (cast aluminum) EMT		
 CIEFSA-1/2 / CIEFSA-4	CIEFSA-1/2	1/2
	CIEFSA-3/4	3/4
	CIEFSA-1	1
	CIEFSA-1-1/4	1 1/4
	CIEFSA-1-1/2	1 1/2
	CIEFSA-2	2
	CIEFSA-2-1/2	2 1/2
	CIEFSA-3	3
	CIEFSA-3-1/2	3 1/2
	CIEFSA-4	4

Service entrance head KO configuration

Diagrams	Trade size (in.)	KO dimensions (in.)		
		Small	Large	Center
 1/2 in. 3/4 in.-1 1/4 in. 1 1/2 in., 2 in. 2 1/2 in., 4 in.	1/2	0.312	—	—
	3/4	0.375	0.400	—
	1	0.438	0.500	—
	1 1/4	0.438	0.625	—
	1 1/2	0.610	0.750	0.400
	2	0.750	1.000	0.525
	2 1/2	0.875	1.300	1.000
	3	1.125	1.750	1.125
	3 1/2	1.125	1.750	1.125
	4	1.125	1.750	1.125