




Power Tap™ Stirrups

Aluminum stirrup connectors built for strength, conductivity and longevity

- High-conductivity and corrosion resistance
- Fit a variety of clamp sizes
- The stirrup's wedge precludes significant conductor creep and minimizes loss of clamping force on connectors
- Contact forces remain nearly constant during temperature changes or conductor compaction
- Driving action helps remove oxidation from conductor and lowers contact resistance
- Approved by the Federal government for utility use

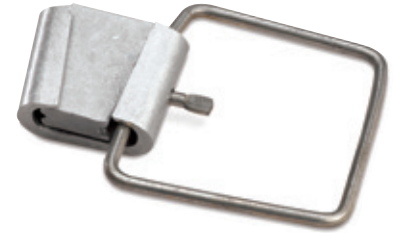

Cat. No.	Wire Size	Bail Size
Use Shell PT-Blue		
PT 4020 S 2	#1, 1/0, 2/0	#2
PT 4005 S 10	1/0, 2/0	1/0
PT 4004 S 2	2/0, 3/0	#2
PT 4007 S 2		
PT 4007 S 10	3/0, 4/0	1/0
PT 4008 S 20		2/0
PT 26602 S 2	266.8	#2
PT 26603 S 10		1/0
PT 35002 S 10	350 AAC	
PT 35002 S 2		#2
Use Shell PT-White		
PT 1050 S 2	#6	#2
PT 1011 S 2	#5, #4, #2	

Cat. No.	Wire Size	Bail Size
Use Shell PT-Yellow		
PT 33606 S 10	336.4	1/0
PT 33605 S 20		2/0
PT 33604 S 40		4/0
PT 47701 S 10	397.4, 477	1/0
PT 55607 S 20		2/0
PT 55606 S 40		4/0
PT 55608 S 10	556	1/0
PT 55607 S 20		2/0
PT 55605 S 40		4/0
PT 79511 S 40	636	
PT 79512 S 20		2/0
PT 79511 S 20	795	
PT 79509 S 40		4/0
PT 103312 S 40	1033.5	4/0

Power Tap™ Terminal Lugs

Strong lugs that withstand corrosion

- Fit a variety of lug sizes



PT 2 N 795

Cat. No.	Wire Size	Tap Groove	Spade Type
PT 2 N 4/0	#2-#6, 1/0-4/0, 266.8	4/0 str.	2-Hole Paddle
PT 2 N 336	336.4, 397.5, 477, 556.5	336.4 str.	
PT 2 N 795	636, 795, 954, 1033.5	795 str.	4-Hole Paddle
PT 4 N 4/0	#2-#6, 1/0-4/0, 266.8	4/0 str.	

Cat. No.	Wire Size	Tap Groove	Spade Type
PT 4 N 336	336.4, 397.5, 477, 556.5	336.4 str.	4-Hole Paddle
PT 4 N 795	636, 795, 954, 1033.5	795 str.	
PT 4 N 336 F	336.4, 397.5, 477, 556.5	336.4 str.	4-Hole Flag
PT 4 N 795 F	636, 795, 954, 1033.5	795 str.	