

ET Series

Power-free pictogram sign



Features

- Illumination provided by borosilicate glass tubes, internally coated with zinc sulphide phosphor and filled with tritium gas
- Minimum brightness at time of manufacture is 0.132 foot-lambert (0.452 cd/m²)
- Decorative, slim-line heavy-duty ABS housing
- Rugged, impact-resistant polycarbonate face
- Spark-free construction
- Simple installation – universal direction capability, comes complete with universal mounting hardware
- Stands up to extreme temperatures in outdoor or indoor applications
- Life expectancy of 10 years (pictogram)
- Available in single or double face
- Certified to standard UL924 (ULC-S572)
- Pictogram sign includes universal stencils (straight from here, left from here and right from here)
- **Warranty details at: www.emergi-lite.ca**



Typical specifications

Offered in a variety of colours and lengths, **Emergi-Lite® Pendant Kits** are designed to facilitate the installation of exit signs at regular mounting heights.

Compatible with both horizontal and sloped ceilings, these pendant kits are truly universal and will adapt to any application.


Please consult your sales representative.

Wire guards

Ordering code	Description
460.0079-E	Wall mount
460.0027-E	End mount
460.0028-E	Ceiling mount

Dimensions

Dimensions are approximate and subject to change.

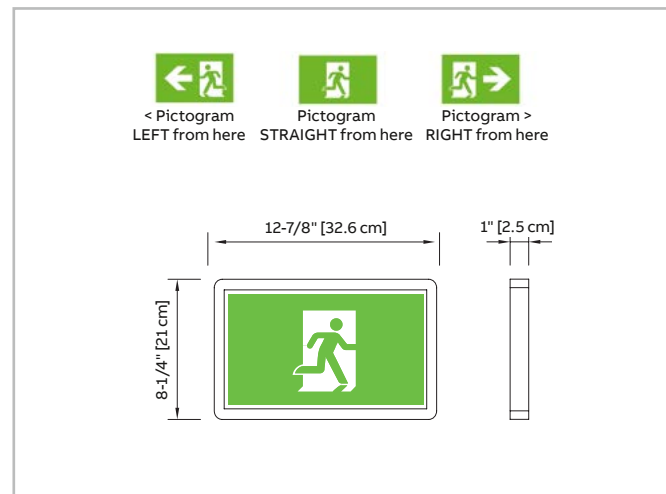

Ordering information

Series	Faceplates and mounting	Frame colours	Life years	Options
ET= Pictogram sign	1= single face universal mount and chevrons 2= double face universal mount and chevrons	AF= aluminum frame B= black G= grey W= white	10= 10 years	PC= polycarbonate shield VR= vandal cover

Example: ET1AF10

Frame colour




Aluminum



Black



Grey



Factory white