

LPEX50-P Series

Extruded aluminum combination unit - 6/12V



Features

Exit Sign

- Extruded aluminum faceplate
- Universal, field-selectable chevrons (knockout)
- **ALINGAP** LED technology

Power Pack

- Completely self-contained unit with rechargeable sealed lead battery
- Lamp heads require no tools to adjust or aim
- Meets or exceeds CSA 22.2 No. 141 requirements
- **Warranty details at: www.emergi-lite.ca/**



nexus®

Typical specifications

Supply and install the **Emergi-Lite® LPEX50-P** LED exit sign and power pack combination series. The exit housing shall be constructed of rugged extruded aluminum. The faceplate shall be constructed of extruded aluminum. The exit sign shall have a maximum depth of 2-1/2". The faceplate(s) shall come standard with knockout chevrons. The light source shall be light emitting diodes (LED). The LED lamps shall provide illumination in normal and emergency operation and shall be mounted inside the exit housing, not on the face. An LED-sensitive diffuser shall be mounted behind the legend to provide the 6" high by 3/4" stroke letters with even illumination. The power pack shall be a completely self-contained emergency unit with its own charger and rechargeable battery. The housing shall be made of steel, painted factory white. The unit shall be designed to furnish exit illumination from the normal AC source. When a power failure occurs the mounted heads along with the exit sign are illuminated in emergency mode for a minimum of 30 minutes. The power pack is furnished with a test switch and high charge pilot light and is available as either 18, 36 or 72W. The heads shall require no tools to adjust and aim. The heads will be constructed of a durable thermoplastic construction and use 6V, 4W LED lamps or as otherwise specified.

The exit sign shall be CSA-C860 approved and meets CSA 22.2 No. 141.

The equipment shall be **Emergi-Lite®** model: _____.

Wire guards

Ordering code	Description
460.0081-E	Wall mount
460.0060-E	Ceiling mount

Power consumption

Model	AC specs	Wattage capacity					
		30 min	1H00	1H30	2H00	4H00	
Exit sign module	Less than 1.5W	-	-	-	-	-	
LPX5-P1	120/347VAC	0.15/0.05 A	18	10	7	6	3
LPX5-P3		0.15/0.05 A	36	21	15	12	6
LPX5-P3A		0.18/0.07 A	72	42	30	24	12
LPX5-P7A		0.15/0.05 A	72	42	30	24	12

Housing colour



Black



Brushed aluminum



Textured aluminum




Factory white

LPEX50-P Series

Extruded aluminum combination unit - 6/12V

Dimensions

Dimensions are approximate and subject to change.

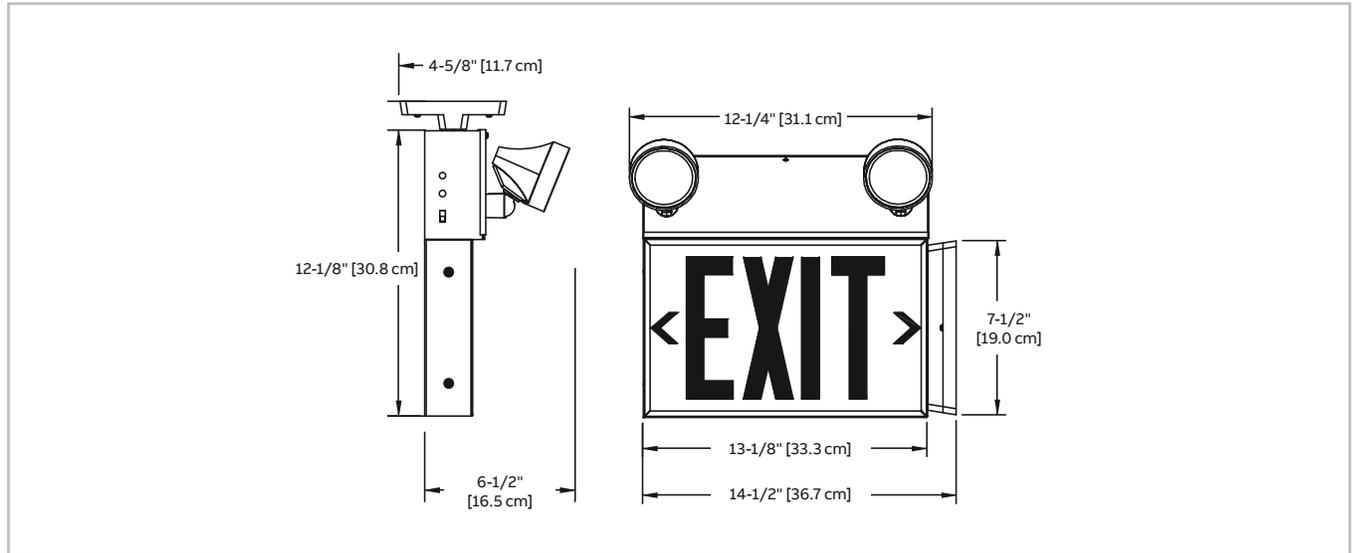

Ordering information

Series	Colour	Voltage	Powerpack
LPEX52= single face	B = black	Blank = 120/347VAC	-P1 = 6V-18W
LPEX53= double face	BA = brushed aluminum ¹	-2 = 277VAC	-P3 = 6V-36W
	TA = textured aluminum ¹		-P3A = 12V-36W
	W = factory white		-P7A = 12V-72W
	¹ Black heads		
Options	Number of heads	Lamp style and wattage	
Blank = no options	/0 = no heads	LA = MR16 LED, 6V-4W	
D = time delay (15 min.)	/1 = one head	LB = MR16 LED, 6V-5W	
G = green legend	/2 = two heads	LG = MR16 LED, 12V-4W	
NEX = NEXUS® system interface ²		LI = MR16 LED, 12V-5W	
NEXRF = wireless NEXUS® system interface ²		LJ = MR16 LED, 12V-6W	
U = auto-diagnostics ³			
UN = auto-diagnostics, non-audible ³			

²Not all options available with NEXUS® system.

Please consult your sales representative.

³Not available for 6V-72W

Example: LPEX52W-P3/2LB