

## Hydraulic PowerTap™ system

- 01 Place cables into connector.
- 02 Place tool head assembly on connector and tighten.
- 03 Attach power unit to tool head assembly using the unique quick-connect coupler.
- 04 Activate power unit.
- 05 Release power unit trigger. Remove the entire tool assembly from the connection.
- 06 The tool head can now be disassembled by pressing the lever on the quick-connect coupling — ready for the next install or for transport.




### Blackburn® battery-powered wedge connector tool

Eliminates the hassles of powder actuation.

- Power unit and tool head feature a unique quick-connect coupler that engages easily and stays locked until the release lever is depressed
  - Quick-connect coupler enables easy assembly of cable and connector without power unit being engaged
  - Once the assembly has been made, power unit can be engaged, using quick-connect coupler to complete final wedge insertion
  - Integrated positive-stop valve precisely matches output pressure of tool to the wedge tap connector being installed
  - Audible bypass alerts you when optimum pressure is achieved
- Tool operates without cartridges
  - Lower installed cost
  - No powder fouling — minimizes cleaning and maintenance
  - Elimination of powder actuation improves safety
- Ergonomic pistol-grip handle ensures user comfort
- Rugged, weather-resistant housing is built to last in outdoor conditions

### Installation sequence for the Blackburn® hydraulic PowerTap™ system

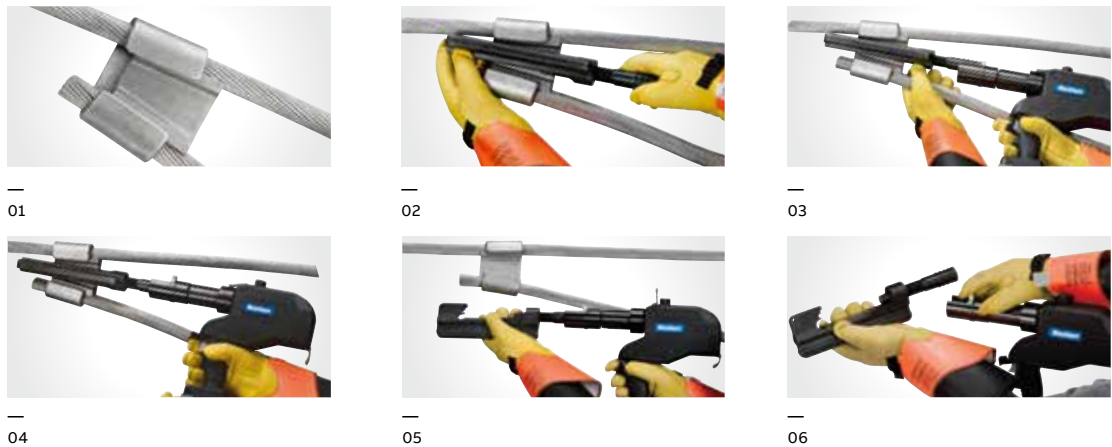

Cat no.	Power unit	Small tool head	Large tool head	Coupling assembly	2 batteries	Battery charger	Connector removal clips	Carrying case
<b>Blackburn battery-powered wedge connector tool</b>								
HPT-TOOL	X	X	X	X	X	X	X	X
HPT-TOOL-S	X	X	-	X	X	X	X	X
HPT-TOOL-L	X	-	X	X	X	X	X	X
HPT-TOOL-PU	X	-	-	X	X	X	-	X