

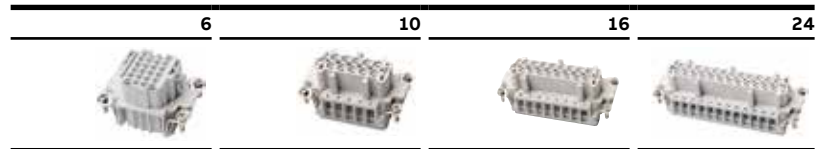
Wire pin & sleeve connectors

T Series 16 A, 600 V AC – 6, 10, 16 & 24 contacts + ground



- High-temp 200 °C rated inserts
- Silicone Viton® seals for molded-edge gaskets*
- Corrosion-resistant copper-free aluminum housings with special finish
- UL94V-O ergonomic thermoplastic handles
- Electrostatic epoxy powder-coated finish

*Viton is a trademark of DuPont Performance Elastomers.

Install to matching series hood/base













Screw terminal inserts

| | Screw terminal inserts* (mm²) | 6 + G | 10 + G | 16 + G | 24 + G |
|---|---|--------|--------|--------|--------|
|  | Male – Pins 20–14 AWG (0.5–2.5) | MS206T | MS210T | MS216T | MS224T |
|  | Female – Sleeve 20–14 AWG (0.5–2.5) | FS106T | FS110T | FS116T | FS124T |

* Inserts may be dark brown or gray in color.

T Series 16 A, 600 V AC

| Bases – standard mount | | NPT entry (in.) | | Number of contacts + ground connection | | | | Lever locking type | |
|--|---|---------------------|-----------------|--|--|----------|----------|--------------------|--|
| | | | | 6 | 10 | 16 | 24 | | |
| Single lever | Double lever | Housing | Single | Double | Double | Double | Double | | |
|  |  | Panel base | – | PB306T | PB110T | PB116T | PB124T | BASES | |
|  |  | Box base (no cover) | 1 x ½ | BB406TMV | BB010TMV | – | – | | |
| | | | 1 x ¾ | – | – | BB016TMV | BB024TMV | | |
| | | | 2 x ½ | BB506TMV | BB110TMV | – | – | | |
| | | | 2 x ¾ | – | – | BB116TMV | BB124TMV | | |
| Hoods – standard mount | | Housing | NPT entry (in.) | | Number of contacts + ground connection | | | | |
| Single lever | Double lever | | Single | Double | Double | Double | Double | | |
|  |  | Side entry | 1 x ½ | SH606T | SH010TMV | – | – | HOODS | |
| | | | 1 x ¾ | – | – | SH016TMV | SH024TMV | | |
| | | | 1 x 1 | – | – | – | SH124TMV | | |
|  |  | Top entry | 1 x ½ | TH806T | TH210T | – | – | HOODS | |
| | | | 1 x ¾ | – | – | TH216T | TH224T | | |
| | | | 1 x 1 | – | – | – | TH324TMV | | |
| Coupler hoods – inline for inline, portable or special service connections. Coupler hoods mate to standard hoods only. | | | | | | | | | |
|  |  | Top entry | 1 x ½ | CH806T | CH610T | – | – | COUPLER | |
| | | | 1 x ¾ | – | – | CH616TMV | CH624T | | |
| | | | 1 x 1 | – | – | CH716T | CH724T | | |

Note: Hoods and Bases are black colored to denote special T series.