

LDX-EXP-S LED SERIES

Battery Units, Self-Powered "Sortie" Signs & Combination Units

new product



TYPICAL SPECIFICATIONS

Supply and install the **Ready-Lite® LDX-EXP-S LED Series** of hazardous location battery equipment. The battery unit housing will be constructed of die cast aluminum with grey epoxy powder coat finish and equipped with heavyduty key holes for wall mounting. The equipment shall be rated for 120, 277 or 347V, 60 Hz input and be CSA listed. The equipment shall have an output of _____ V and _____ W and shall supply the rated load for a minimum of a 1/2 hour to 87,5% of the rated battery voltage. The battery shall be a long-life, maintenance-free lead-calcium type. The charger shall be fully computer tested and have its charge voltage set in the factory to ± 1% tolerance. The charger shall be current limited, temperature compensated, shortcircuit proof and reverse polarity protected. The charger shall be furnished with an electronic lockout circuit, which will connect the battery when the AC circuit is activated, and an electronic brownout circuit.

Where required the equipment shall come complete with _____ heads, each of them equipped with _____ lamp(s) of _____ W.

The head housing shall be Die-Cast aluminum with grey epoxy powder coat finish. The lenses shall be a clear, impact and heat resistant prismatic glass globe. The head shall be factory sealed, with no need for external seals.

Where required the equipment shall come complete with one Exit Sign and will include a transfer circuit to maintain the Exit Sign permanently lighting in both normal and emergency operation. The exit housing shall be industrial grade 14-gauge steel and finished in grey enamel. The faceplate will be constructed of heavy-duty 14-gauge steel.

The equipment shall be certified CSA C22.2 No.137-M1981 for Hazardous Locations:

Class _____, Division _____, Group _____.

The Pictogram Exit Sign shall be CSA C22.2 No.141-10 certified.

The equipment shall be **Ready-Lite®** Model: _____.

CSA CERTIFIED FOR USE IN HAZARDOUS LOCATIONS

The **LDX-EXP-S LED Series** of battery equipment is designed to cover emergency lighting applications for the entire spectrum of hazardous locations, where inflammable gases, vapors, liquids, dust particles or fabrics tissues are permanently present or are likely to exist.

The **LDX-EXP-S LED Series** combines in one simple-to-order catalogue family three traditional emergency lighting products with battery back-up: battery units with emergency lights, Self-Powered Sortie Signs, and combination units with emergency lights and Sortie Sign. The equipment is also available with additional emergency power capacity to drive remote heads and Sortie Signs.

FEATURES

- CSA Certified for use in hazardous locations:
 - Class I, Division 1, Groups B, C, D
 - Class I, Division 2, Groups A, B, C, D
 - Class II, Divisions 1 and 2, Groups E, F, G
 - Class III, Divisions 1 and 2
 - For wall mount only
 - Die-Cast aluminum body with grey epoxy powder coat finish; clear, impact and heat resistant prismatic glass globe
 - Long-life, maintenance-free Lead-Calcium battery
 - Battery charger is current limited, temperature compensated, short-circuit proof and reverse polarity protected
 - Emergency heads with one or twin lamp design
 - Large Self-Powered combo includes a transfer circuit to drive an additional three (3) remote pictogram exit signs (total power max 15W)
 - Easy-to-build catalogue number based on the **Ready-Lite®** Severity Codes
 - Meets or exceeds CSA C22.2 No.141-10 & No. 137
- See warranty details at: www.tnb.ca/en/brands/ready-lite


POWER CONSUMPTION AND UNIT RATING

UNIT CAPACITY	INPUT VOLTAGE	INPUT RATING	WATTAGE CAPACITY				
			30MIN	1 H	1.5 H	2 H	4 H
12V-72W*	120V, 60Hz	0.25A, 25W	72	36	25	20	10
	277V, 60Hz	0.125A, 28W					
	347V, 60 Hz	0.115A, 28W					
12V-120W	120V, 60Hz	0.45A, 37W	120	60	40	30	15
	277V, 60Hz	0.209A, 42W					
	347V, 60 Hz	0.176A, 42W					
24V-144W	120V, 60Hz	0.465A, 38W	144	72	50	40	20
	277V, 60Hz	0.208A, 42W					
	347V, 60 Hz	0.178A, 42W					

NOTE: Combo, no remote Sortie capability.

TEMPERATURE CODES FOR LDX SERIES (BATTERY & SORTIE COMBINATION UNITS)

SEVERITY CODE	S1	S2	S3	S4
TEMPERATURE CODE	T6 85°C (185°F)	T6 85°C (185°F)	T6 120°C (248°F)	T6 85°C (185°F)

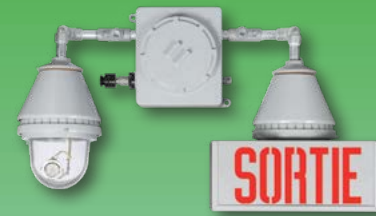

LDX-EXP-S LED SERIES

Battery Units, Self-Powered "Sortie" Signs & Combination Units

TEMPERATURE CODES: MEASURED AT 40°C AMBIENT

Explosion-proof equipment is composed of one or more modules, each of them qualified for a specific temperature code. The temperature code of the complete equipment (enclosure + sortie sign + emergency heads) is defined as the most severe of the temperature codes identified for each of the modules below.

TEMPERATURE CODES FOR LDX-EXP-P SERIES (BATTERY UNIT ENCLOSURE)


SEVERITY CODE	S1	S2	S3	S4
TEMPERATURE CODE	T6 85°C (185°F)	T6 85°C (185°F)	T6 120°C (248°F)	T6 85°C (185°F)

SEVERITY CODE SELECTION CHART

ENVIRONMENT	SEVERITY CODE
Cl. I, Div. 1 & 2, Gr. B	S1
Cl. I, Div. 1, Gr. C, D	S2
Cl. I, Div. 2, Gr. A, B, C, D	S3
Cl. II, Div. 1 & 2, Gr. E, F, G & Cl. III	S4

DIMENSIONS

Dimensions are approximate and subject to change.

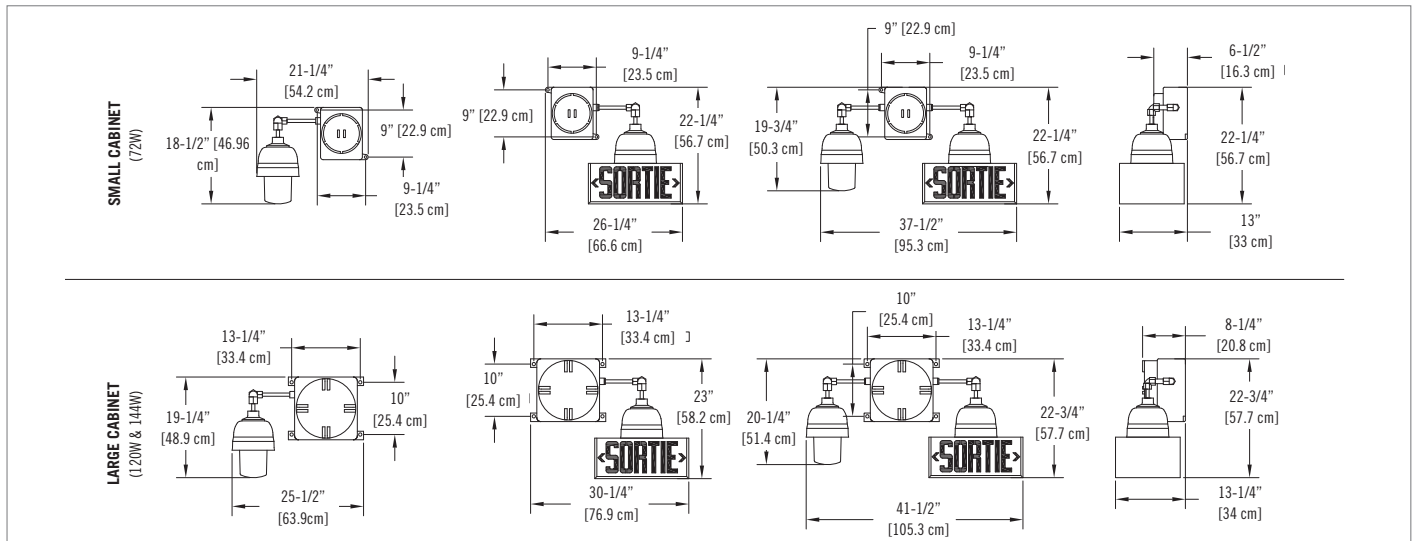

ORDERING CHART

DC VOLTAGE	CAPACITY	SERIES	LIGHTING HEAD STYLE	SEVERITY CODE	LAMP TYPE, VOLTAGE AND POWER	SIGN/FACE	AC VOLTAGE	OPTIONS
LDX12= 12V	-72= 72W ¹ -120= 120W	EXP= Hazardous location	/11= Single remote, 1 lamp	S1= Cl.I, Div.1&2, Gr.B	Blank= no lamp	Blank= No sign	Blank= 120VAC	Blank= No options
LDX24= 24V	-144= 144W		/12= Single remote, 2 lamps	S2= Cl.I, Div.1, Gr. C, D	LD7= 12V-4W MR16 LED	S1= Single face LED Sortie sign	U277= 277VAC input	D3= Time delay (15 minutes)
			/21= Double remote, 1 lamp each ¹	S3= Cl.I, Div.2, Gr. A, B, C, D	LD9= 12V-5W MR16 LED	S2= Double face LED Sortie sign	U347= 347VAC input	TP= Transfer panel ^{1,2}
			Blank= no heads	S4= Cl.II, Div.1&2, Gr. E, F, G & Cl.III	LD10= 12V-6W MR16 LED			¹ Not available with 12V-72W. Standard with combo.
					LD13= 24V-4W MR16 LED			² Not available for S1 and S2.

EXAMPLE: LDX12-72EXP/11S1LD7S1